




# PS2V POWER STROKE HONES

## FEATURES

- Takes blocks as long as 42"
- 14" Power stroke length - 16" manual.
- Hones 2.7" - 5.5" diameter with standard equipment.
- Variable stroke rate and hone RPM - matches all bore sizes.
- Cradle indexed for precise alignment of in-line, and 60° or 90° V's.
- For engine block capacity, honing precision, ease of use, and rugged construction, the PS2V is equal to the best power stroke cylinder hones on the market.
- With its ability to accept a wider range of blocks - and its faster floor to floor time - the PS2V lets you handle more jobs and earn a better margin on every one, and can produce higher quality work. It quickly recovers its purchase cost, and from then on, year after year, it continues to put more dollars in your pocket.


## STANDARD EQUIPMENT

- Friction Feed Unit
- Hone Head (2.5" - 5.5" diameter)
- 7 - 5 Gallon Honing Oil
- Grit (2.7" - 4.1")
  - 70 Grit
  - 150 Grit
  - 280 Grit
- Grit (3.5" - 5.5")
  - 70 Grit
  - 150 Grit
  - 280 Grit

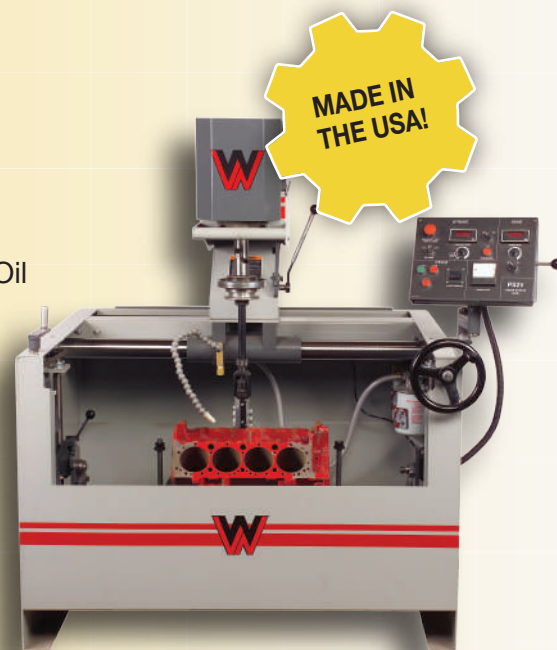

**The PS2V Power Stroke Hone is designed for engine block capacity, honing precision, ease of use, and rugged construction.**

**Allows you to handle more jobs and earn a better margin on every one.**



Model	Details
Max. Block Length	42"
Max. Stroke	14"
Honing Range (STD)	2.7" - 5.5"
Hone Motor	2HP
Honing Speed	40 - 240 RPM
Stroke Motor	2HP
Stroke Speed	10 - 110 SPM
Coolant Capacity	50 gal.
Coolant Flow	13.5 GPM
Door Opening	48"
Dimensions	68" l x 60" w x 70" h

